

Data Sheet

High Current Switching DC Power Supplies

Models 1693 & 1694



High Current at a Low Price

B&K Precision models 1693 and 1694 switching mode DC power supplies provide high current output in a lightweight and compact form factor. These 900W power supplies provide a variable voltage output from 1V to 15V at 60A (model 1693) or from 1V to 30V at 30A (model 1694). In addition, a remote sensing terminal is available to compensate for voltage drop across the load leads.

The analog remote control feature can be used to control the output voltage or turn the output on/off.

Switching power supplies have the advantage of being lightweight and high in efficiency when compared to traditional linear mode power supplies. The efficiency of the 1693 and 1694 can exceed 85% under optimal conditions. These power supplies are also designed with advanced circuitry to protect against overtemperature and overvoltage conditions. Combined with bright LED displays, the 1693 and 1694 are ideal for users who want a reliable and easy-to-use high-current DC power supply for system or bench use.

Features and Benefits

- Up to 60 A output current
- Lightweight and compact
- Dual 3-digit LED displays
- Remote sense terminal
- Analog remote control via external voltage source or variable resistor
- Current foldback circuitry with illuminated indicator prevents overloading the power supply
- Overtemperature protection circuitry
- Overvoltage protection
- Front panel auxiliary output


Outputs/Model	1693	1694
Variable Output Voltage	1 - 15 V	1 - 30 V
Output Current	60 A	30 A

Valuable Features




Auxiliary Output Terminal

Conveniently placed on the front panel for quick use, this auxiliary terminal is connected in parallel with the main output terminal and provides an additional output for your application.



Analog Remote Control Capability

Use the included connector to wire up to an external variable DC voltage source or variable resistor to remotely control the power supply's output voltage or to turn the output on/off.




Remote Sense

Improve regulation of the power supply's output voltage at the load by using the remote sense terminals to compensate for voltage drops across the load leads.

Easy Operation



Rear Panel

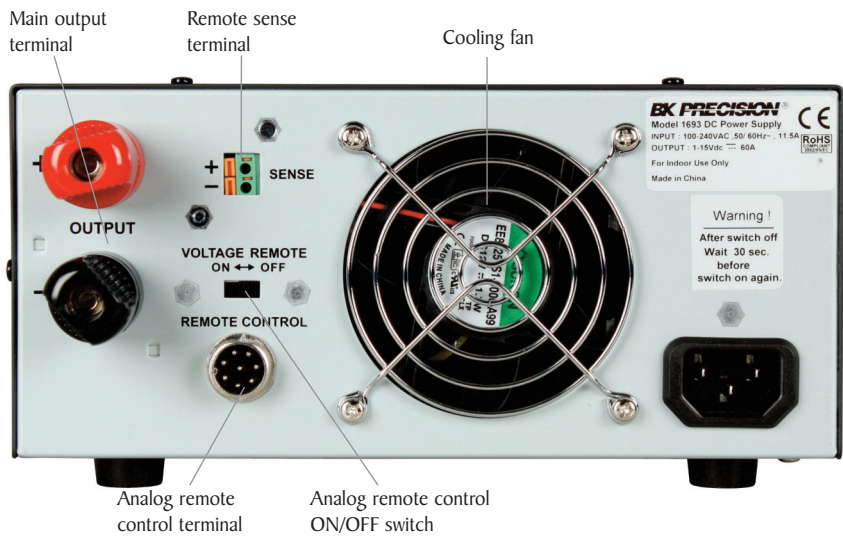

Specifications

Model	1693	1694
Variable Output Voltage	1-15 V	1-30 V
Output Current	60 A	30 A
Rated Auxiliary Output Current	5 A	3 A
Ripple and Noise	40 mVpp	
Load Regulation	0.1% + 5 mV	
Line Regulation	0.05% + 3 mV	
Input Voltage	100-240 VAC, 50Hz/60Hz	
Efficiency	>85%	
Dynamic Power Factor Correction	>0.97 at optimal load	
Voltmeter and Ammeter Display	3-digit LED displays	
Meter Accuracy	+/- 1% + 1 count	
Indicator	Green LED for power on/off indication Red LED for overload/short circuit indication	
Special Features	Analog Remote Control & Remote Sense	
Cooling Method	Variable speed thermostatically controlled fan	
Operating Temperature	32 °F to 104 °F (0 °C to 40 °C), ≤ 80% R.H.	
Storage Temperature	5 °F to 158 °F (-15 °C to 70 °C), ≤ 85% R.H.	
Protections	Overload (Constant Current Limiting), Short Circuit, OTP (Overtemperature Protection), and OVP (Overvoltage Protection)	
Approvals	CE-EMC: EN 55022 CE-LVD:EN 60950	
Dimension (W x H x D)	8.66" x 4.33" x 14.17" (220 x 110 x 360 mm)	
Weight	12.8 lbs (5.8 kg)	
One Year Warranty		
Included accessories: Power cord, instruction manual, remote control connector		

Note: All specifications apply to the unit after a temperature stabilization time of 15 minutes over an ambient temperature range of 23 °C ± 5 °C.

Distributed by:



testoon.COM
The measurement website

99, rue Beranger 92320 Chatillon - France
Tel : +33 (0)1 71 16 17 00; Fax : +33 (0)1 71 16 17 03
www.testoon.com