

Fluke tools are designed to keep you safe in dangerous environments



Fluke's intrinsically safe tools can be used to help you perform maintenance and calibration tasks in potentially explosive and hazardous areas. Learn about the importance of intrinsic safety on the job and the industries that use intrinsically safe tools.

Fluke offers a wide range of reliable, accurate and intrinsically safe tools. Including the **NEW 28II Ex True-rms Multimeter** and the **NEW Fluke 568 Ex Infrared Thermometer**, which compliments the line of Fluke intrinsically safe field calibrators.



Fluke 725Ex
Multifunction
Process Calibrator



Fluke 28II Ex
True-rms Industrial
Multimeter



Fluke 718Ex
Pressure
Calibrator



Fluke 707Ex
Loop Calibrator



Fluke 700PEX
Pressure Modules



Fluke 568 Ex
Infrared
Thermometer



700G Series
Precision Pressure
Test Gauges



1551/1552 "Stik"
Thermometers

Fluke Intrinsically Safe products help to keep you safe on the job

“Intrinsically Safe” or I.S. is a protection method employed in potentially explosive atmospheres. Certified I.S. tools are designed to prevent the release of sufficient energy to cause ignition of flammable material. I.S. standards apply to all equipment that can create one or more of a range of defined potential explosion sources:

- Electrical sparks
- Electrical arcs
- Flames
- Hot surfaces
- Static electricity
- Electromagnetic radiation
- Chemical reactions
- Mechanical impact
- Mechanical friction
- Compression ignition
- Acoustic energy
- Ionizing radiation

Industries that use or should use I.S. tools include:

- Petro-chemical
- Oil platforms and refineries
- Pharmaceutical
- Pipelines
- Any environment where explosive gases or vapors could be present

Fluke 700PEX Pressure Modules

Best suited for:



- Use with the Fluke 725Ex Multifunctional Process Calibrator and Fluke 718Ex Pressure Calibrator to cover the most commonly used pressure calibration ranges from 0-25 mbar up to 0-200 bar

Features:

- I.S. Class I Div 1 Groups A-D T4, Ta = 0 °C to +50 °C
- ATEX II 1G Ex ia IIC T4 compliant
- Very high accuracy up to 0.025 %



1551/1552 “Stik” Thermometers


Best suited for:



- Daily checks of working thermometers
- Custody transfer temperature determination, PET calibration, LIG calibration, temperature transmitter calibration and verification

Features:

- ATEX II 2 G Ex ib IIB T4 Gb, Ta -10 °C to 50 °C
1551A range: -50 °C to 160 °C (-58 °F to 320 °F)
1552A range: -80 °C to 300 °C (-112 °F to 572 °F)
- Accuracy (1 year): ± 0.05 °C (± 0.09 °F)
- Easy data logging available with 1552A

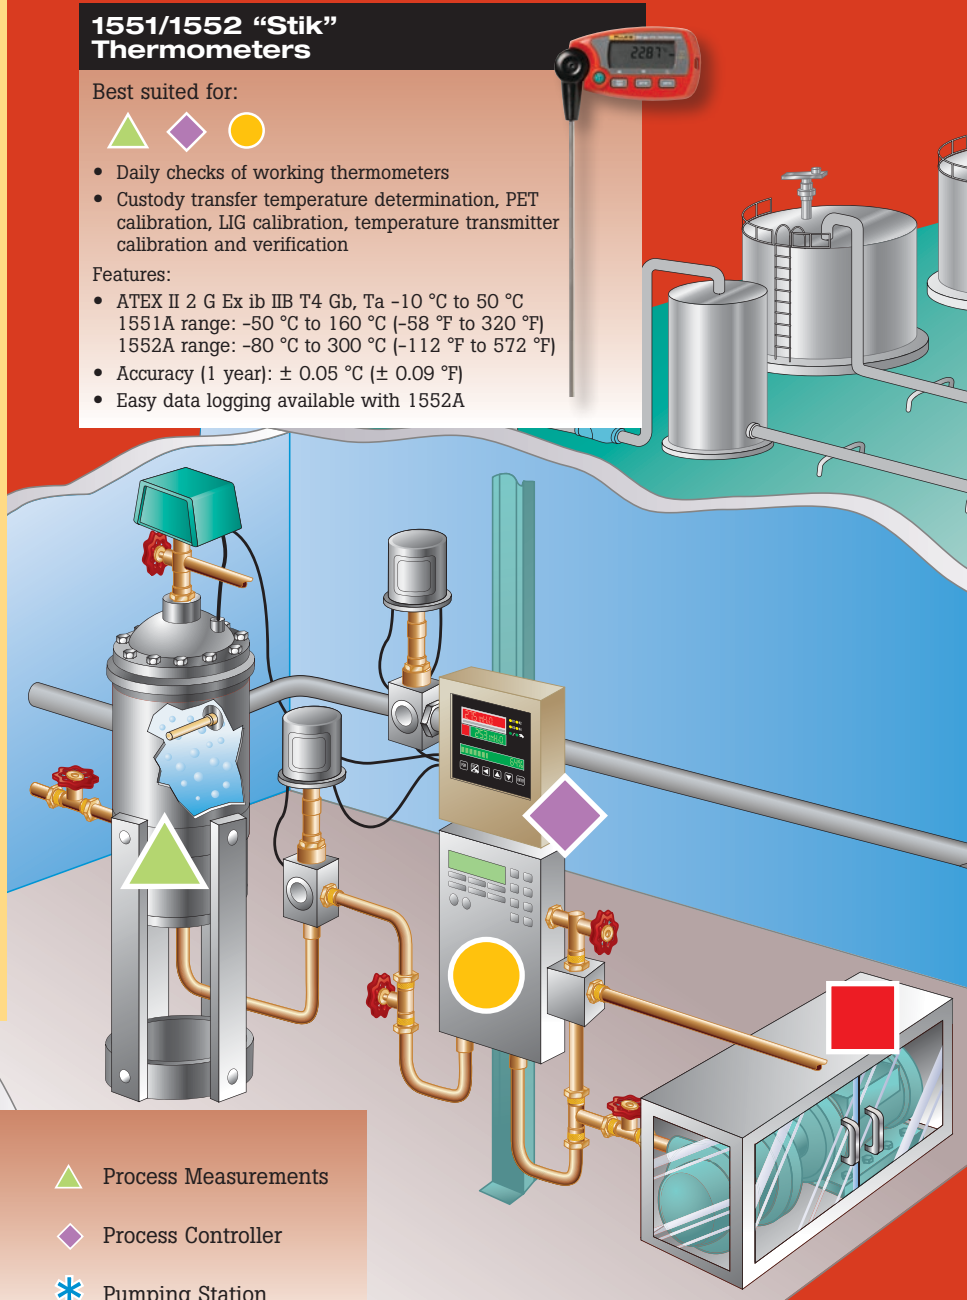

Legend

- | | |
|----------------------|----------------------|
| Motor Control Center | Process Measurements |
| Flow Computer | Process Controller |
| Tank Farm | Pumping Station |

Fluke 725Ex Multifunction Process Calibrator

Best suited for:



- Calibrating virtually any process parameter

Features:

- Class I Div 1 Groups B-D 171 °C
- ATEX II IG Ex ia IIB 171 °C Compliant
- Measure, source or simulate volts dc, mA, RTDs, thermocouples, frequency and ohms
- 2-channel simultaneous source and measure capability for calibration of transmitters
- Internal loop supply to power transmitters
- Store frequently-used test setups for later use
- Pressure measurement to 200 bar and pressure switch test using any of the 8 Fluke 700PEX pressure modules



Fluke 568 Ex Intrinsically Safe Infrared Thermometer


Best suited for:



- Taking spot, differential or scanning temperature measurements in any environment where flammable gases or vapors may be present

Features:

- Class I Div 1 and Div 2 or Zone 1 and 2 hazardous environments
- ATEX/IECEX, NEC-500/NEC-505, PCEC, INMETRO certified
- Enhanced 50:1 distance to spot ratio allows user to measure smaller objects from farther away
- Comfortable pistol grip makes target pointing an easy job
- Backlit display for poorly lit areas
- Displays Min/Max/DIF/AVG measurements and saves in memory
- Adjustable emissivity setting for more accurate measurements
- Log up to 99 measurements
- Compatible with mini-connector K-type thermocouple (KTC) probe

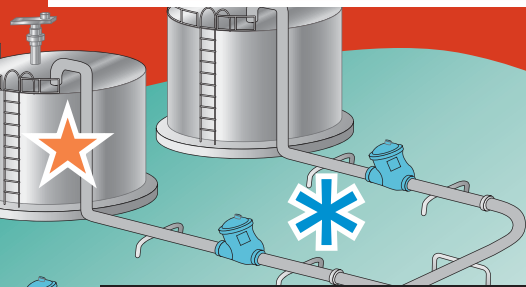

700G Series Precision Pressure Test Gauges

Best suited for:



- Precision pressure measurement from 0 inH₂O/20 mbar to 10,000 psi/690 bar and absolute pressure measurement

Features:

- CSA; Class 1, Div 2, Groups A-D rating
- ATEX rating: II 3 G Ex nA IIB T6
- Accuracy to 0.05 % of full scale
- Reference class gauge accuracies to 0.04 % of reading
- Log up to 8,493 pressure measurements to memory



Fluke 718Ex Pressure Calibrator

Best suited for:



- Pressure measurements and calibration with internal sensor at pressure ranges of 2, 7 and 20 bar

Features:

- Class I Div 1 Groups A-D T4 Compliant
- ATEX II IG Ex ia IIC T4 compliant
- Built-in pressure/vacuum hand pump, with vernier and bleed valve
- Pressure measurement to 200 bar using any of the 8 Fluke 700PEX Pressure Modules
- Pressure measurement to 0.05 % of full span using internal pressure sensor
- Pressure switch test function



Fluke 707Ex Loop Calibrator

Best suited for:



- Calibration and maintenance of 4 to 20 mA control loop

Features:

- F.M. Class I Div 2 Groups A-D T4
- ATEX II 2G Ex ia IIC T4 compliant
- Large display and simple, quick-click push/rotary button for easy one-handed operation
- Simultaneous mA and % readout for quick, easy interpretation of readings
- mA accuracy of 0.015 %, superior to other loop calibrators
- Pushbutton with 25 % steps for fast, easy linearity checks
- 0 and 100 % 'span check' for fast confirmation of zero and span



Fluke 28II Ex True-rms Industrial Multimeter

Best suited for:



- Solving problems on motor drives, in plant automation, power distribution and electromechanical equipment

Features:

- Class I Div 1 Groups A-D
- ATEX II 2 G Ex ia IIC T4 Gb
- ATEX II 2 D Ex ia IIIC T130C Db
- ATEX I M1 Ex ia I Ma
- Low voltage troubleshooting in hazardous areas
- Built-in thermometer allows you to take temperature readings
- Large digit display with bright, two-level
- IP67 rated, waterproof and dustproof




Making sense of the product rating systems

Each approved intrinsically safe device is rated to ATEX, NEC, FM or other country standards. The corresponding rating system allows you to understand which zones, type of protection, gas groups and temperature classes the instrument is approved for.

ATEX Example


Fluke 707Ex is  ATEX Compliant II 2 G Ex ia IIC T4


 The ATEX examination mark is required on all devices for use in European hazardous areas.

ATEX Markings

II 2 G	The classification of zones. "II" designates the tool is approved for all non-mining areas. "2" represents the category of the device, in this case the device is rated for the second most hazardous areas. "G" designates atmosphere, in this case gas, vapors and mist.
Ex	Explosion protection based on European Ex-regulations.
ia	The type of protection from explosion, in this case the energy in a device or connector has been reduced to a safe value.
IIC	Gas Group. "IIC" rating indicates compatibility with the most dangerous gas groups.
T4	Temperature class is the maximum temperature of a surface that may be.

FM Example

Fluke 707Ex is  APPROVED FM-classified N.I. Class I, Div 2, Groups A-D, T4

 APPROVED The Factory Mutual Approved mark.

Factory Mutual Markings

N.I.	Non-incendive apparatus, internal energy is limited so a specified atmosphere cannot be ignited by its use.
Class I	For use with gases, vapors and liquids (not dust, fibers or filings).
Div 2	Certified for use in Zone 2, explosive atmospheres not normally present, may rarely exist for short duration.
Groups A-D	Rated for use with explosive gasses as defined by groups A-D, including acetylene, hydrogen, acetylene and propane.



Fluke. Keeping your world up and running.®

Fluke Corporation
PO Box 9090, Everett, WA 98206 U.S.A.

Fluke Europe B.V.
PO Box 1186, 5602 BD Eindhoven, The Netherlands

For more information call:
In the U.S.A. (800) 443-5853 or Fax (425) 446-5116
In Europe/M-East/Africa +31 (0) 40 2675 200 or Fax +31 (0) 40 2675 222
In Canada (800)-36-FLUKE or Fax (905) 890-6866
From other countries +1 (425) 446-5500 or Fax +1 (425) 446-5116
Web access: <http://www.fluke.com>

©2005-2014 Fluke Corporation.
Specifications subject to change without notice.
Printed in U.S.A. 4/2014 2432675C_EN

Modification of this document is not permitted without written permission from Fluke Corporation.

Distributed by:



testoon.com
The measurement website

99, rue Beranger 92320 Chatillon - France
Tel : +33 (0)1 71 16 17 00; Fax : +33 (0)1 71 16 17 03
www.testoon.com