


# Dual Input True RMS AC Voltage/Current Datalogger

**Datalog up to 256,000 readings**

*With user programmable sample rate from 1 second to 24 hours*

## Features:

- Simultaneously measure two AC Voltage inputs or two AC Current inputs or one AC Voltage and one AC Current input
- Readings can be downloaded to your PC via the USB interface and analyzed using the included software or exported to a spreadsheet
- LCD indicates time/date, current readings and Min/Max
- Auto Power off and battery check
- Complete with two Current sensor modules, two Voltage sensor modules, two sets of test leads, two sets of alligator clips, USB cable, Windows® compatible software, universal AC Adaptor, and 4 AAA batteries

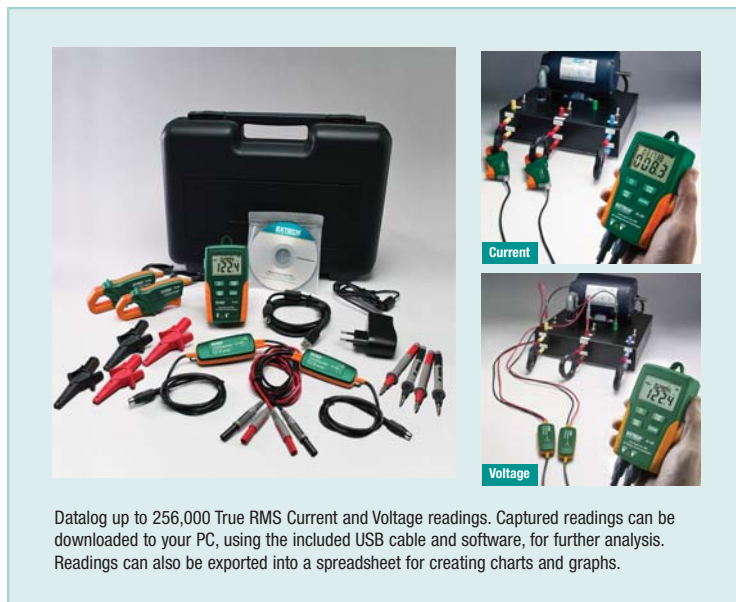

Datalog up to 256,000 True RMS Current and Voltage readings. Captured readings can be downloaded to your PC, using the included USB cable and software, for further analysis. Readings can also be exported into a spreadsheet for creating charts and graphs.

Distributed by:

**testoon**.COM  
The measurement website  
99, rue Beranger  
92320 Chatillon - France  
Tel : +33 (0)1 71 16 17 00  
Fax : +33 (0)1 71 16 17 03  
[www.testoon.com](http://www.testoon.com)



Function	Range	Resolution	Basic Accuracy
AC Current	10 to 200A	0.1A	±(2% rdg ± 1A)
AC Voltage	10 to 600V	0.1V	±(2% rdg ± 1V)
Memory	256,000 points		
Sampling Rate	1 second to 24 hours		
PC Interface	USB includes software		
Power	4 x AAA batteries		
Dimensions	4.5 x 2.5 x 1.3" (114 x 63 x 34mm)		
Weight	8.7oz (248g)		

## Ordering Information:

DL160 .....Dual Input True RMS AC Voltage/Current Datalogger

